FOREST BRIGHT
ARCHITECTURAL WOOD DOOR

# HPDL FOAM CORE FLUSH WOOD DOOR | NON-RATED

| | | |
|---|---|---|
| Models | FO-H-00 | |
| Maximum Size | Non-rated, 1-3/8", 1-3/4" or 2" thick | |
| | | Non-Rated |
| | Single | 4'0"x10'0" |
| | Pairs | 8'0"x10'0" |
| Faces | High pressure decorative laminate (HPDL) or Thermal Fused Laminate (TFL). | |
| Crossbands | High Density Fiberboard (HDF). | |
| Core | Modified EPS foam core. | |
| Weight | Approx. 3.4 lbs. per square foot (1-3/4"). | |
| Vertical Stiles | 1-3/8" SCL stiles with customized matching color PVC edgebanding. | |
| Top Rail | 1-3/8" SCL top rail with customized matching color PVC edgebanding. | |
| Bottom Rail | 1-3/8" SCL bottom rail with customized matching color PVC edgebanding. | |
| Factory Finish | N/R | |
| Acoustical Rating | STC 30 (operable, tested with seals & gaskets). | |
| Machining | Machining preparation per hardware manufacturer's templates. | |
| Lite | Vision lites max. height 36", one cutout per door, with special liner built into core; 6" minimum lite-lock margins. | |
| Bevel Option | Non-bevel, 1 side bevel or 2 side bevels, 1/8" at 2" as standard. | |
| Quality Standard | ANSI/WDMA I.S.1-A standard. | |
| WDMA Performance Level | Heavy Duty; Extra Heavy Duty available with additional blocking. Blocking / lock block required at all hardware locations. | |
| Warranty | 1 year. Interior use only. | |
| Cross Section | 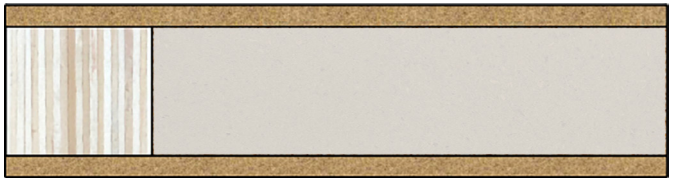 | |



*Note: Doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.*
** Fire-Rated doors will be constructed per label service listing and may deviate from above.*

info@forestbright.com
www.forestbright.com