FOREST BRIGHT
ARCHITECTURAL WOOD DOOR

PAINT GRADE FOAM CORE FLUSH WOOD DOOR

NON-RATED

Models	FO-PR-00	
Maximum Size	Non-rated, 1-3/8", 1-3/4" or 2" thick	
		Non-Rated
	Single	4'0"x10'0"
	Pairs	8'0"x10'0"
Faces	Primed High Density Fiberboard (HDF) or Medium Density Overlay (MDO).	
Core	Modified EPS foam core.	
Weight	Approx. 3.4 lbs. per square foot (1-3/4").	
Vertical Stiles	1-3/8" SCL stiles.	
Top Rail	1-3/8" SCL top rail.	
Bottom Rail	1-3/8" SCL bottom rail.	
Factory Finish	Factory primed or factory opaque finish to meet WDMA OP-6.	
Acoustical Rating	STC 30 (operable, tested with seals & gaskets).	
Machining	Machining preparation per hardware manufacturer's templates.	
Lite	Vision lites max. height 36", one cutout per door, with special liner built into core; 6" minimum lite-lock margins.	
Bevel Option	Non-bevel, 1 side bevel or 2 side bevels, 1/8" at 2" as standard.	
Quality Standard	ANSI/WDMA I.S.1-A standard.	
WDMA Performance Level	Heavy Duty; Extra Heavy Duty available with additional blocking. Blocking / lock block required at all hardware locations.	
Warranty	1 year. Interior use only.	
Cross Section	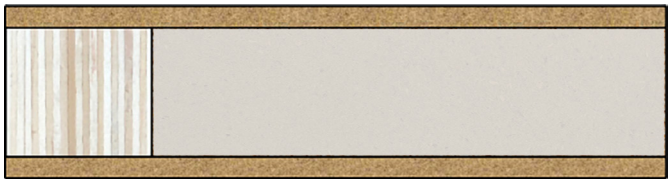	

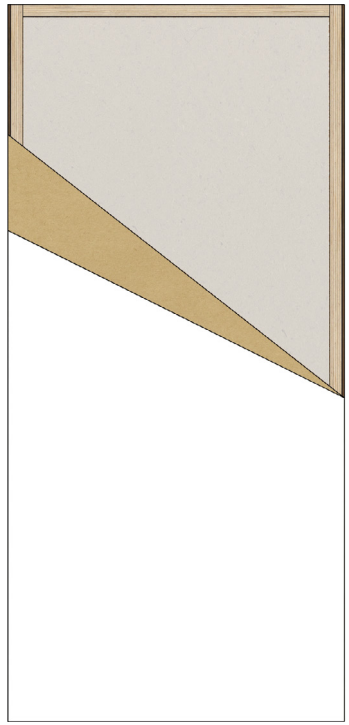

Note: Doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.
** Fire-Rated doors will be constructed per label service listing and may deviate from above.*

info@forestbright.com
www.forestbright.com