FOREST BRIGHT
ARCHITECTURAL WOOD DOOR

WOOD VENEER FOAM CORE FLUSH WOOD DOOR

NON-RATED

Models	FO-V-00	
Maximum Size	Non-rated, 1-3/8", 1-3/4" or 2" thick	
		Non-Rated
	Single	4'0"x10'0"
	Pairs	8'0"x10'0"
Faces	WDMA custom "A" grade wood veneer as standard. Premium "AA" grade available by request. Different species of natural wood veneer available, reconstituted wood veneer available.	
Crossbands	High Density Fiberboard (HDF).	
Core	Modified EPS foam core.	
Weight	Approx. 3.4 lbs. per square foot (1-3/4").	
Vertical Stiles	1-3/8" SCL stiles with matching hardwood edge or veneer edgebanding.	
Top Rail	1-3/8" SCL top rail with matching hardwood edge or veneer edgebanding.	
Bottom Rail	1-3/8" SCL bottom rail.	
Factory Finish	WDMA TR-6 Catalyzed Polyurethane factory finish to match custom color sample.	
Acoustical Rating	STC 30 (operable, tested with seals & gaskets).	
Machining	Machining preparation per hardware manufacturer's templates.	
Lite	Vision lites max. height 36", one cutout per door, with special liner built into core; 6" minimum lite-lock margins.	
Bevel Option	Non-bevel, 1 side bevel or 2 side bevels, 1/8" at 2" as standard.	
Quality Standard	ANSI/WDMA I.S.1-A standard.	
WDMA Performance Level	Heavy Duty; Extra Heavy Duty available with additional blocking. Blocking / lock block required at all hardware locations.	
Warranty	1 year. Interior use only.	
Cross Section	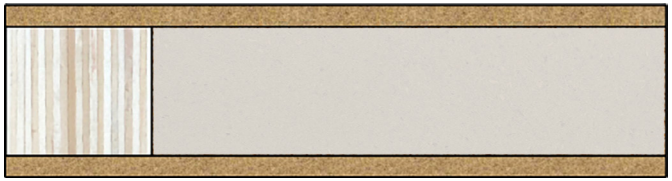	



Note: Doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.
** Fire-Rated doors will be constructed per label service listing and may deviate from above.*

info@forestbright.com
www.forestbright.com