FOREST BRIGHT
ARCHITECTURAL WOOD DOOR

Hollow Metal Welded Frame.

Standard Features

- 16-gauge cold rolled or galvanized steel
- Unequal rabbet / 2-inch face; 4-inch face heads available
- 5/8-inch stop height
- Exact fit mitered corners, welded corners
- 7-gauge hinge reinforcement with standard / heavy duty adjustment
- 4-7/8" universal strike preparation
- Floor anchor included
- 9/32-inch silencer preparation
- Wall anchors for masonry, wood stud and metal stud walls, loose or welded in
- 4" - 13" jamb depth
- 20 minutes to 3 hour fire label

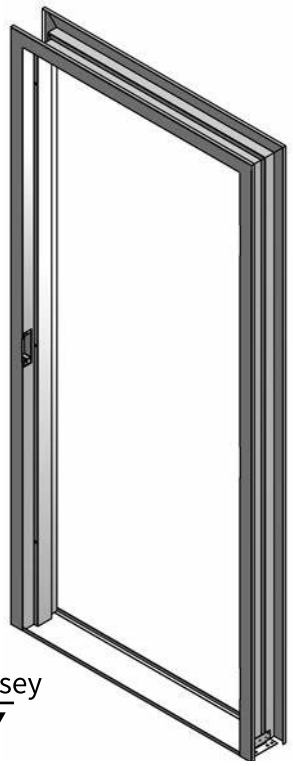

Warnock Hersey

HINGE PREPARATION

4-1/2" X .134"
ANSI A156.7 TEMPLATE
7 GAUGE STEEL REINFORCEMENT



UNIVERSAL STRIKE PREPARATION

UNIVERSAL (4-7/8")
ANSI A115.1 & 2 TEMPLATE
12 GAUGE STEEL REINFORCEMENT
STANDARD FOR 1-3/4" DOORS



CYLINDRICAL LOCK STRIKE PREPARATIO

CYLINDRICAL (2-3/4") ANSI A115.2
TEMPLATE 14 GAUGE STEEL REINFORCEMENT
ALSO AVAILABLE WITHOUT LIP
CUTOUT FOR DEADBOLTS



WELDED CORNERS

WELDED CORNERS ARE TIGHT FITTING
TO PROVIDE A SMOOTH SEAMLESS
APPEARANCE



FLOOR ANCHOR

18 GAUGE FLOOR ANCHORS ARE
STANDARD IN ALL MASONRY FRAMES



OTHER ANCHORS



STEEL STUD ANCHOR



WOOD STUD ANCHOR



MASONRY WIRE

HEBEI FOREST BRIGHT WOOD INDUSTRY CO., LTD.
F5 Changjiu Center, No. 312 Huai'an East Road., Shijiazhuang, Hebei China

FOREST BRIGHT
ARCHITECTURAL WOOD DOOR

Hollow Metal KD Drywall Frame.

Standard Features

- 16-gauge cold rolled or galvanized steel
- Unequal rabbet / 2-inch face
- 5/8-inch stop height
- Exact fit mitered corners with screw reinforcement between head and jamb sides
- 7-gauge hinge reinforcement with standard / heavy duty adjustment
- 4-7/8" universal strike preparation
- Screw adjusting compression anchors on jamb side
- 9/32-inch silencer preparation
- 5-5/8" - 9-3/4" jamb depth
- 1/2-inch double returns
- 20 to 90-minute fire label

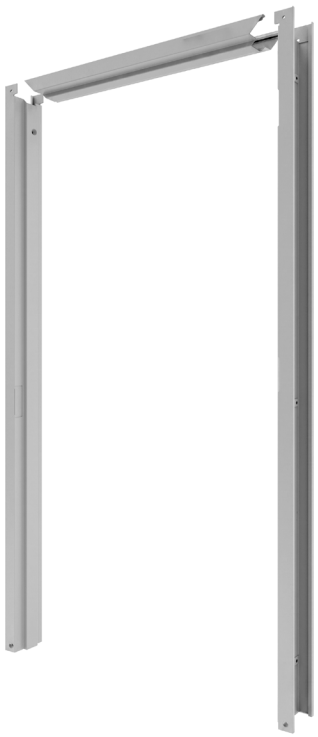



Warnock Hersey ®

HINGE PREPARATION 4-1/2" X .134" ANSI A156.7 TEMPLATE 7 GAUGE STEEL REINFORCEMENT	
UNIVERSAL STRIKE PREPARATION UNIVERSAL (4-7/8") ANSI A115.1 & 2 TEMPLATE 12 GAUGE STEEL REINFORCEMENT STANDARD FOR 1-3/4" DOORS	
CYLINDRICAL LOCK STRIKE PREPARATIO CYLINDRICAL (2-3/4") ANSI A115.2 TEMPLATE 14 GAUGE STEEL REINFORCEMENT ALSO AVAILABLE WITHOUT LIP CUTOUT FOR DEADBOLTS	
COMPRESSION ANCHOR ONE EACH JAMB ADJUST WITH SCREWDRIVER	
STANDARD SILL STRAP ANCHOR	
OPTIONAL BASEHOLE SILL ANCHOR	

HEBEI FOREST BRIGHT WOOD INDUSTRY CO., LTD.
F5 Changjiu Center, No. 312 Huai'an East Road., Shijiazhuang, Hebei China

FOREST BRIGHT
ARCHITECTURAL WOOD DOOR

Hollow Metal Adjustable Drywall Frame.

Standard Features



- 16-gauge galvanized steel
- 3-piece system designed to adjust to multiple wall depths
- Slide rails along the frame throat enable the frame to accommodate 4-5/8" to 7-3/4" thick walls
- Three 7-gauge 4-1/2" x 4-1/2" hinge reinforcements for 6'8" and 7'0"
- doors
- Four 7-gauge 4-1/2" x 4-1/2" hinge reinforcements for 8' doors
- Hinge reinforcement accepts standard or heavy weight template hinges
- 12-gauge ASA strike reinforcement
- Frame is prepared for silencer operation

90-minute WHI mark as standard

Warnock Hersey

HINGE PREPARATION

4-1/2" X .134"
ANSI A156.7 TEMPLATE
7 GAUGE STEEL REINFORCEMENT



UNIVERSAL STRIKE PREPARATION

UNIVERSAL (4-7/8")
ANSI A115.1 & 2 TEMPLATE
12 GAUGE STEEL REINFORCEMENT
STANDARD FOR 1-3/4" DOORS



FRAME SECTIONS

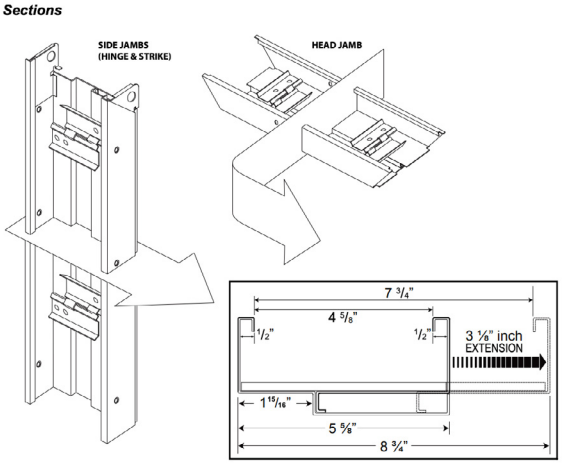

HEBEI FOREST BRIGHT WOOD INDUSTRY CO., LTD.
F5 Changjiu Center, No. 312 Huai'an East Road., Shijiazhuang, Hebei China

FOREST BRIGHT
ARCHITECTURAL WOOD DOOR

16-Gauge Masonry Frame.

Standard Features

- 16-gauge cold rolled or galvanized steel
- Unequal rabbet / 2-inch face; 4-inch face heads available
- 5/8-inch stop height
- Exact fit mitered corners, welded corners
- 7-gauge hinge reinforcement with standard / heavy duty adjustment
- 4-7/8" universal strike preparation
- Floor anchor included
- 9/32-inch silencer preparation
- Wall anchors for masonry, wood stud and metal stud walls, loose or welded in
- 4" - 13" jamb depth
- 20 minutes to 3 hour fire label

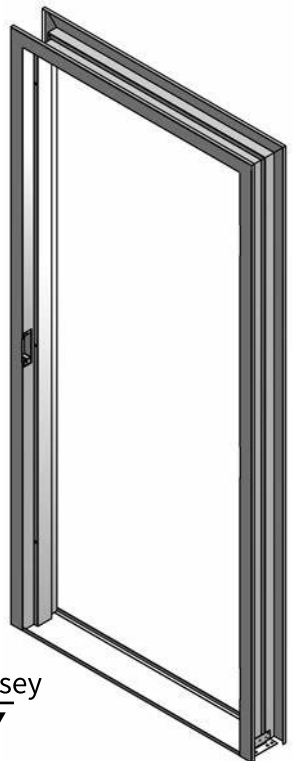

Warnock Hersey

HINGE PREPARATION

4-1/2" X .134"
ANSI A156.7 TEMPLATE
7 GAUGE STEEL REINFORCEMENT



UNIVERSAL STRIKE PREPARATION

UNIVERSAL (4-7/8")
ANSI A115.1 & 2 TEMPLATE
12 GAUGE STEEL REINFORCEMENT
STANDARD FOR 1-3/4" DOORS



CYLINDRICAL LOCK STRIKE PREPARATIO

CYLINDRICAL (2-3/4") ANSI A115.2
TEMPLATE 14 GAUGE STEEL REINFORCEMENT
ALSO AVAILABLE WITHOUT LIP
CUTOUT FOR DEADBOLTS



WELDED CORNERS

WELDED CORNERS ARE TIGHT FITTING
TO PROVIDE A SMOOTH SEAMLESS
APPEARANCE



FLOOR ANCHOR

18 GAUGE FLOOR ANCHORS ARE
STANDARD IN ALL MASONRY FRAMES



OTHER ANCHORS



STEEL STUD ANCHOR



WOOD STUD ANCHOR



MASONRY WIRE

HEBEI FOREST BRIGHT WOOD INDUSTRY CO., LTD.
F5 Changjiu Center, No. 312 Huai'an East Road., Shijiazhuang, Hebei China