FOREST BRIGHT
ARCHITECTURAL WOOD DOOR

## PAINT GRADE PARTICLEBOARD CORE FLUSH WOOD DOOR

## NON-RATED & 20 MINUTE POSITIVE PRESSURE

| | | | | |
|---|---|---|---|---|
| Models | PB-PR-00 PB-PR-20 | | | |
| Maximum Size | ITS-WH MAX 20min, 1-3/8", 1-3/4", 2" or 2-1/4" thick | | | |
| | | Non-Rated | CAT A Positive Pressure | CAT B Positive Pressure |
| | Single | 4'0"x10'0" | 4'0"x8'0" | 4'0"x8'0" |
| | Pairs | 8'0"x10'0" | 8'0"x8'0" | 8'0"x8'0" |
| Faces | Primed High Density Fiberboard (HDF) or Medium Density Overlay (MDO). | | | |
| Core | Particleboard Core, ANSI A208.1, grade LD-2. | | | |
| Weight | Approx. 5.5 lbs. per square foot (1-3/4"). | | | |
| Vertical Stiles | 1-3/8" SCL stiles. | | | |
| Top Rail | 1-3/8" SCL top rail. | | | |
| Bottom Rail | 1-3/8" SCL bottom rail. | | | |
| Factory Finish | Factory primed or factory opaque finish to meet WDMA OP-6. | | | |
| Acoustical Rating | STC 30 (operable, tested with seals & gaskets). | | | |
| Machining | All hardware preparations, including pre-drilled hinge pilot holes and mortise cutouts, are factory-machined strictly per approved shop drawings and manufacturer templates. | | | |
| Cutouts | 5-1/2" minimum distance from door edge and the minimum distance between lite and lock cut out is 3-1/4" for 20-min fire door. | | | |
| Bevel Option | Non-bevel, 1 side bevel or 2 side bevels, 1/8" at 2" as standard. | | | |
| Quality Standard | ANSI/WDMA I.S.1-A standard; AWS Section 9 & bonded core available on request. | | | |
| WDMA Performance Level | Heavy Duty. Blocking required for face-applied hardware at extra heavy duty. | | | |
| Warranty | Limited Lifetime, Interior use only. | | | |
| Cross Section |  | | | |

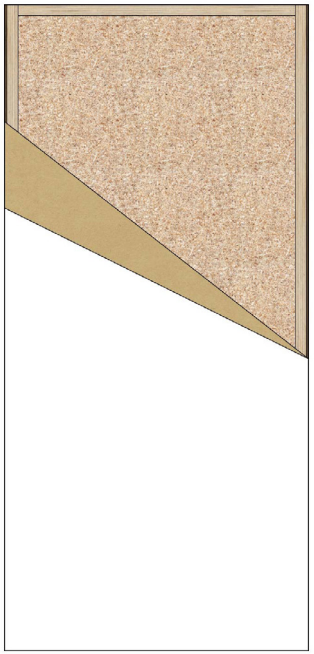

C US
Intertek

*Note: Doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.*
** Fire-Rated doors will be constructed per label service listing and may deviate from above.*

info@forestbright.com
www.forestbright.com