FOREST BRIGHT
ARCHITECTURAL WOOD DOOR

SCL CORE FLUSH WOOD DOOR - PAINT GRADE

NON-RATED & 20 MINUTE POSITIVE PRESSURE

Models	SCL-PR-00 SCL-PR-20			
Maximum Size	ITS-WH MAX 20min, 1-3/4" or 2" thick			
		Non-Rated	CAT A Positive Pressure	CAT B Positive Pressure
	Single	4'0"x10'0"	4'0"x8'0"	4'0"x8'0"
	Pairs	8'0"x10'0"	8'0"x8'0"	8'0"x8'0"
Faces	Primed High Density Fiberboard (HDF) or Medium Density Overlay (MDO).			
Core	Structural Composite Lumber Core (SCL).			
Weight	Approx. 6 lbs. per square foot (1-3/4").			
Vertical Stiles	1-3/8" SCL stiles.			
Top Rail	1-3/8" SCL top rail.			
Bottom Rail	1-3/8" SCL bottom rail.			
Factory Finish	Factory primed or factory opaque finish to meet WDMA OP-6.			
Acoustical Rating	STC 31 (operable, tested with seals & gaskets).			
Machining	All hardware preparations, including pre-drilled hinge pilot holes and mortise cutouts, are factory-machined strictly per approved shop drawings and manufacturer templates.			
Cutouts	5-1/2" minimum distance from door edge and the minimum distance between lite and lock cut out is 3-1/4" for 20-min fire door.			
Bevel Option	Non-bevel, 1 side bevel or 2 side bevels, 1/8" at 2" as standard.			
Quality Standard	ANSI/WDMA I.S.1-A standard; AWS Section 9 & bonded core available on request.			
WDMA Performance Level	Extra Heavy Duty. No hardware blocking required — SCL core.			
Warranty	Limited Lifetime, Interior use only.			

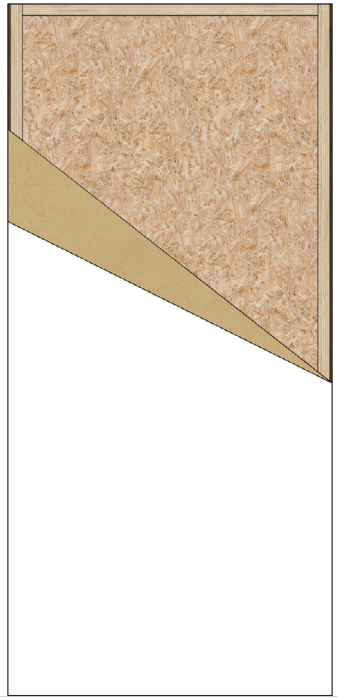

Cross Section



C US
Intertek

Note: Doors are manufactured per the standards listed on this page. Specifications are subject to change without notice.
** Fire-Rated doors will be constructed per label service listing and may deviate from above.*

info@forestbright.com
www.forestbright.com